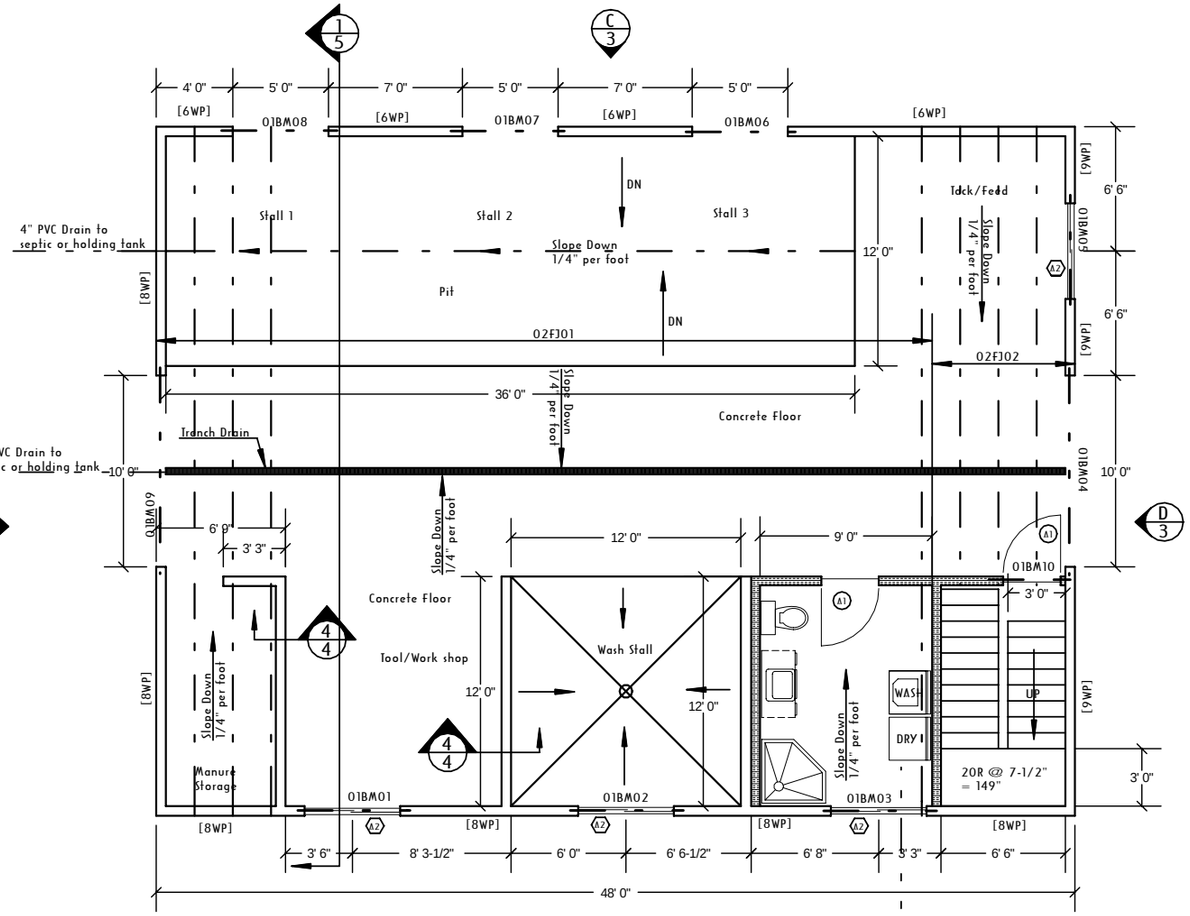

GROUND FLOOR

A/3

Waste line to on-site septic

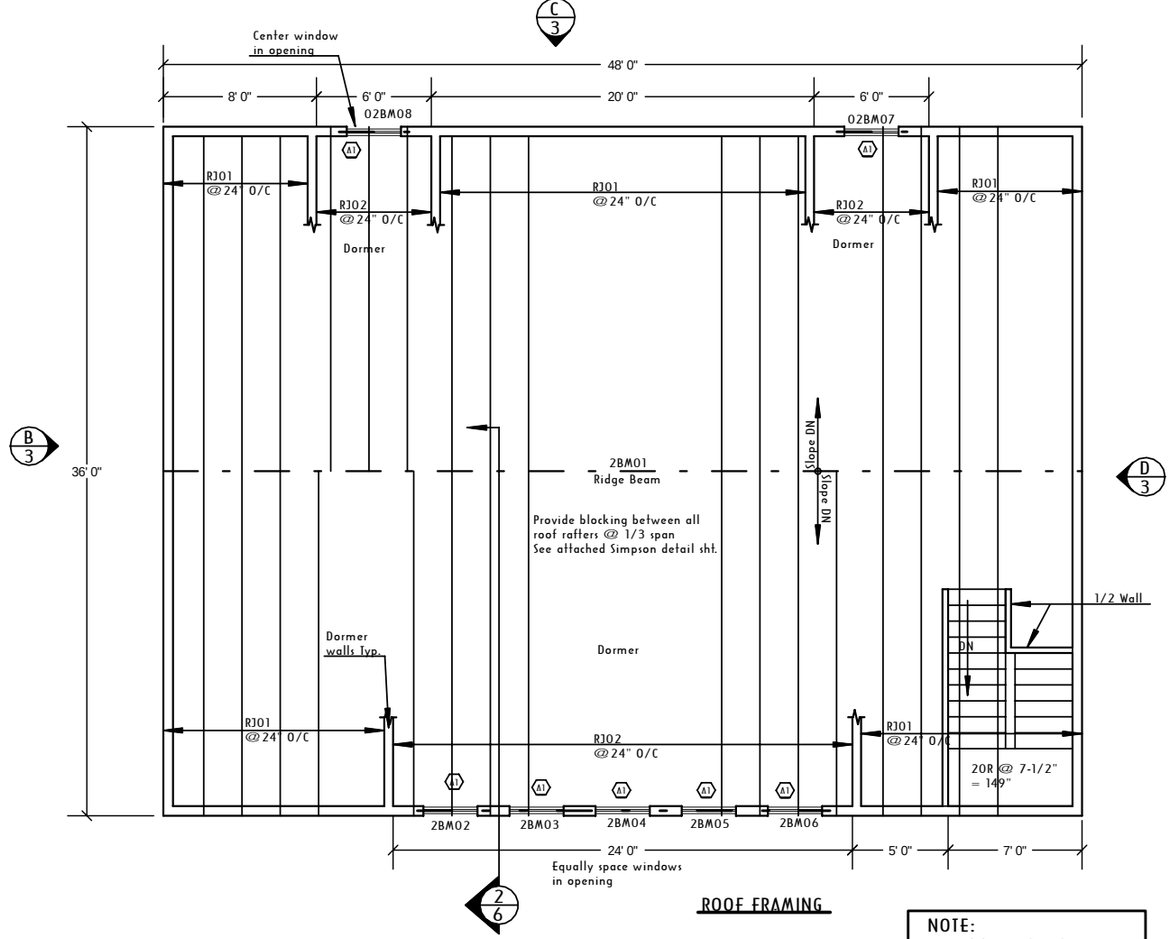

ROOF FRAMING

A/3

NOTE:
See sht. 5 of 7 for Eve, Ridge, Bearing wall & Overhang details

Floor Sheathing

Min. Exterior Sheathing Required by Code = 3WP

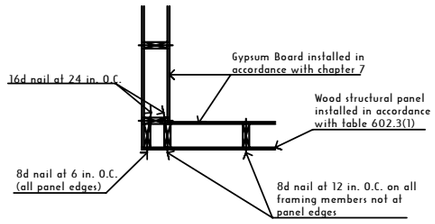

OUTSIDE CORNER DETAIL
N.T.S

NOTE:

1. [3 GP] Shear panel designation. See structural calculations Dated 6/24/06 Min. shear panels may be increased to higher rated sheathing as desired.
2. "1BM03" Framing member designation. See Beam-Joist-Header schedule Structural calculations dated 6/24/06
3. Install all manufactured components in according with manufactures instructions.
4. Contractor to verify all dimensions
5. Contractor to match existing
6. Contractor is responsible for fit and finish of new to existing
7. Contractor to make adjustments to given dimensions as needed to obtain required fit and finish

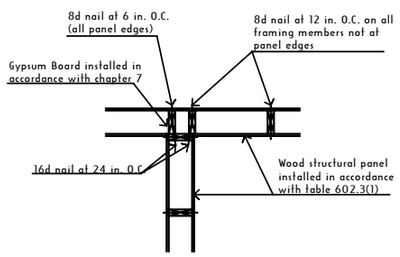

PARTITION DETAILS
N.T.S

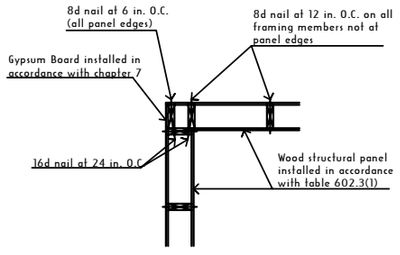

INSIDE CORNER DETAIL
N.T.S

DOOR SCHEDULE

	Size	Material/Type	Description	Fire Rating	"U" Value	Qty.	
A1	3' 0" x 6' 8"	Metal	Exterior	30 Min.	N/A	2	
A2							
A3							
A4							
A5							
A6							
A7							

WINDOW SCHEDULE

	Size	Matl/Type	Description	Grids	"U" Value	Header Hgt.	Qty.	
A1	3648	Vinyl	Sgl Hung		0.32		7	
A2	6036	Vinyl	Sgl Hung/single pane		N/A		4	
A3								
A4								
A5								
A6								

NOTE:
Install Open Web Trusses per manufacturers instructions
See back 4 pages of structural calculations for information

BEAM/HEADER SCHEDULE

Member	Size	Bearing Length	Remarks
RJ01	14" TJI 110 @ 24" O/C		
RJ02	14" TJI 110 @ 24" O/C		
RJ03	1-1/2" x 7-1/4" 1.3E SS HF #2 @ 24" O/C		
02FJ01	28" TJH Open Web Truss @ 16" O/C		
02FJ02	28" TJL Open Web Truss @ 16" O/C		
2BM01	6-3/4" x 37-1/2" Glulam (24F-v4 DF)	6"	
2BM02,03,04,05,06,07,08	5-1/2" x 7-1/2 1.1E SS HF #2	1-1/2"	
1BM01	5-1/2" x 9 Glulam (24F-1.8E Framing DF)	5-3/4"	
1BM02	5-1/2" x 12 Glulam (24F-1.8E Framing DF)	5-3/4"	
1BM03	5-1/2" x 9 Glulam (24F-1.8E Framing DF)	5-1/2"	
1BM04, 09	5-1/2" x 18 Glulam (24F-1.8E Framing DF)	6-1/4"	
1BM05	5-1/2" x 7-1/2 1.1E SS HF #2	1-1/2"	
1BM06, 07, 08	5-1/2" x 9 Glulam (24F-1.8E Framing DF)	3-1/2"	
1BM10	5-1/2" x 7-1/2 1.1E SS HF #2	1-1/2"	
1BM11, 12	3-1/2" x 9 Glulam (24F-1.8E Framing DF)	2-3/4"	Protect weather: provide metal flashing